




## CHARGING INSTALLATION: **240 VOLT NEMA 10-30 OUTLET**

The Mobile Connector is included as standard equipment with all new vehicles. This is a 20-foot-long cable with interchangeable adapters which can be used to plug in to different outlets. This guide provides detail on installing a NEMA 10-30 outlet for home charging with the Mobile Connector. Adapter purchased separately.

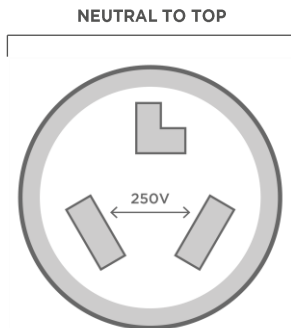

### **NEMA 10-30** DETAILS

- **Circuit Breaker:** 30 amps
- **Voltage:** Single phase, 208-250 volt AC supply, 60 hertz
- **Three Wire Configuration:** Line 1 - Line 2 - Neutral
- **Conductors:** 10 AWG copper wire for circuits up to 100 feet
- **Outlet:** Use a high quality, industrial grade outlet
- **Neutral Prong Orientation:** Top position of outlet
- **Ventilation:** Not required




### USING THE **MOBILE CONNECTOR**

Attach adapter to Mobile Connector, plug into outlet and then into vehicle to begin charging. The NEMA 10-30 adapter will allow a Tesla to draw up to 24 amps (5.7 kW at 240 volts). Recharge speeds will vary between different models.

#### MILES OF RANGE PER HOUR OF CHARGE

MODEL 3	MODEL S	MODEL X
22	17	14

## INSTALL **LOCATIONS**

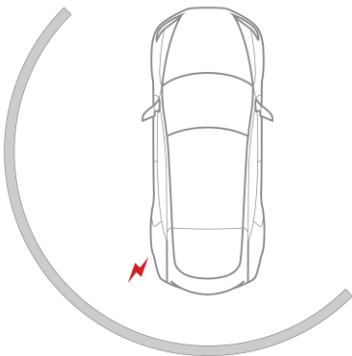

**CHARGE PORT**

**RECOMMENDED INSTALLATION AREA**

## ADDITIONAL **SUPPORT**

### **EMAIL**

[CHARGINGINSTALLATION@TESLA.COM](mailto:CHARGINGINSTALLATION@TESLA.COM)

### **PHONE**

650.681.6133 (M-F 8:30 AM - 5:30 PM PST)

### **24/7 TECH SUPPORT**

877.798.3752

### **WEB**

[TESLA.COM/SUPPORT](https://tesla.com/support)

### **ONLINE STORE**

[SHOP.TESLA.COM](https://shop.tesla.com)