




## CHARGING INSTALLATION: **240 VOLT NEMA 14-30 OUTLET**

The Mobile Connector is included as standard equipment with all new vehicles. This is a 20-foot-long cable with interchangeable adapters which can be used to plug in to different outlets. This guide provides detail on installing a NEMA 14-30 outlet for home charging with the Mobile Connector. Adapter purchased separately.



### **NEMA 14-30** DETAILS

- **Circuit Breaker:** 30 amps
- **Voltage:** Single phase, 208-250 volt AC supply, 60 hertz
- **Four Wire Configuration:** Line 1 - Line 2 - Ground - Neutral
- **Conductors:** 10 AWG copper wire for circuits up to 100 feet
- **Outlet:** Use a high quality, industrial grade outlet
- **Ground Pin Orientation:** Top position of outlet
- **Ventilation:** Not Required




### USING THE **MOBILE CONNECTOR**

Attach adapter to Mobile Connector, plug into outlet and then into vehicle to begin charging. The NEMA 14-30 adapter will allow a Tesla to draw up to 24 amps (5.7 kW at 240 volts). Recharge speeds will vary between different models.

#### **MILES OF RANGE PER HOUR OF CHARGE**

<b>MODEL 3</b>	<b>MODEL S</b>	<b>MODEL X</b>
22	17	14

### INSTALL **LOCATIONS**

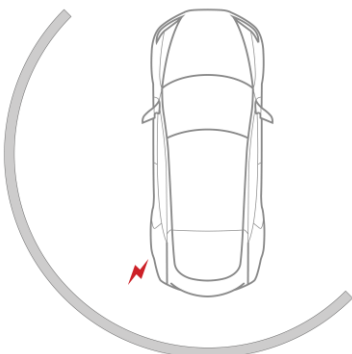

 **CHARGE PORT**

 **RECOMMENDED INSTALLATION AREA**

### ADDITIONAL **SUPPORT**

#### **EMAIL**

[CHARGINGINSTALLATION@TESLA.COM](mailto:CHARGINGINSTALLATION@TESLA.COM)

#### **PHONE**

650.681.6133 (M-F 8:30 AM - 5:30 PM PST)

#### **24/7 VEHICLE TECH SUPPORT**

877.798.3752

#### **WEB**

[TESLA.COM/SUPPORT](https://TESLA.COM/SUPPORT)

#### **ONLINE STORE**

[SHOP.TESLA.COM](https://SHOP.TESLA.COM)